




MVE 2300/4D-50A0 (ED40110050A0LA000U)

3 PH - 4 poles - 1800 RPM - 230/460 V - 60 Hz

Working moment (Lb*in)	Unbalance (Lb*in)	Centrifugal force (Lb)	Nominal voltage (V)	Input power (Hp)	Current (A)	Power factor	Ia/In
49.33	24.67	2,266.35	230/460	0.91	Δ 3 Y 1.5	0.65	3.8

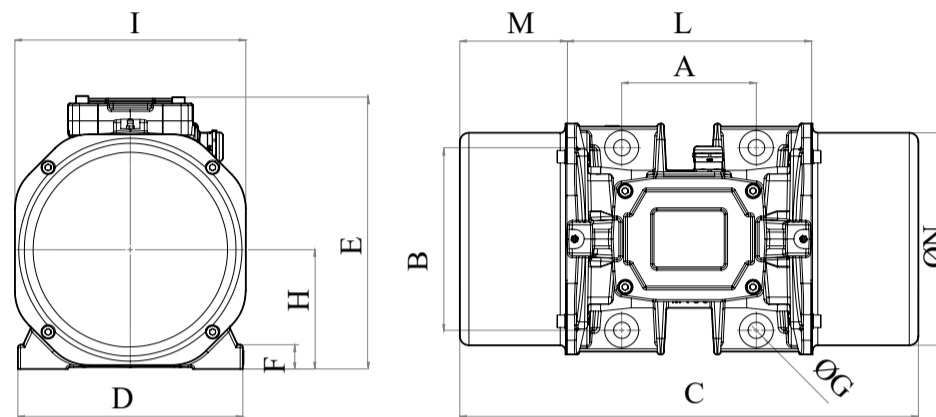

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app. Contact us for more information.

OVERALL DIMENSIONS [inches]													
Weight (Lb)	A	B	G	Holes number	C	D	E	F	H	I	L	M	N
99.21	4.72	6.69	0.67	4	15.59	8.23	9.88	1.06	4.06	7.28	8.07	3.76	6.52

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque (Ft-Lb)	Cable type	Cable gland
Please refer to the label on the motorvibrator	Yes	5/8"	0.656"x1.312"	136.35	16-4c 115°C	3/4" NPT 115°C

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
NJ 306		13651	28721	>100000

CERTIFICATION	
ATEX II 2G Ex db IIB T4 Gb, II 2D Ex tb IIIC T135°C Db IECEx Ex db IIB T4 Gb Ex tb IIIC T135°C Db UL CLASS I Div.1 GROUP C,D T4 T.Amb -20/+60°C IP66	

REV.4-20/05/2021

Dimension with coarse degree of accuracy related to UNI 22768/1 Rights reserved to modify technical specifications.

